
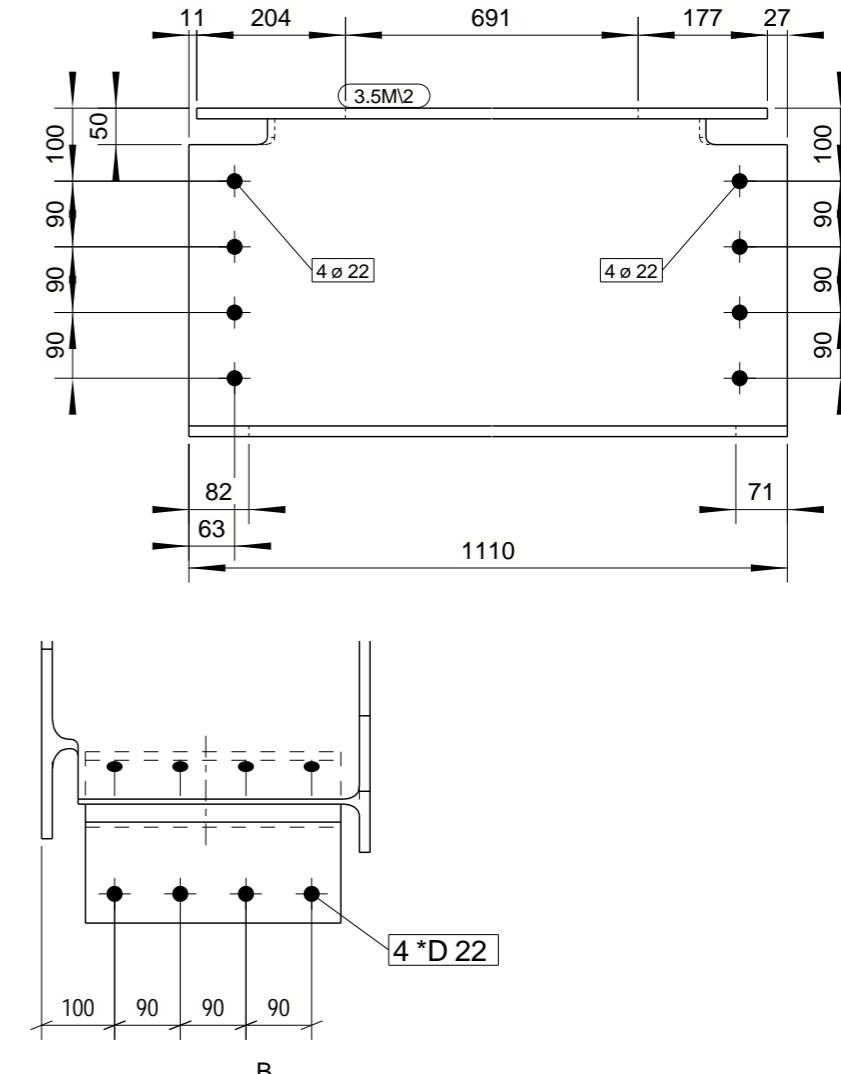
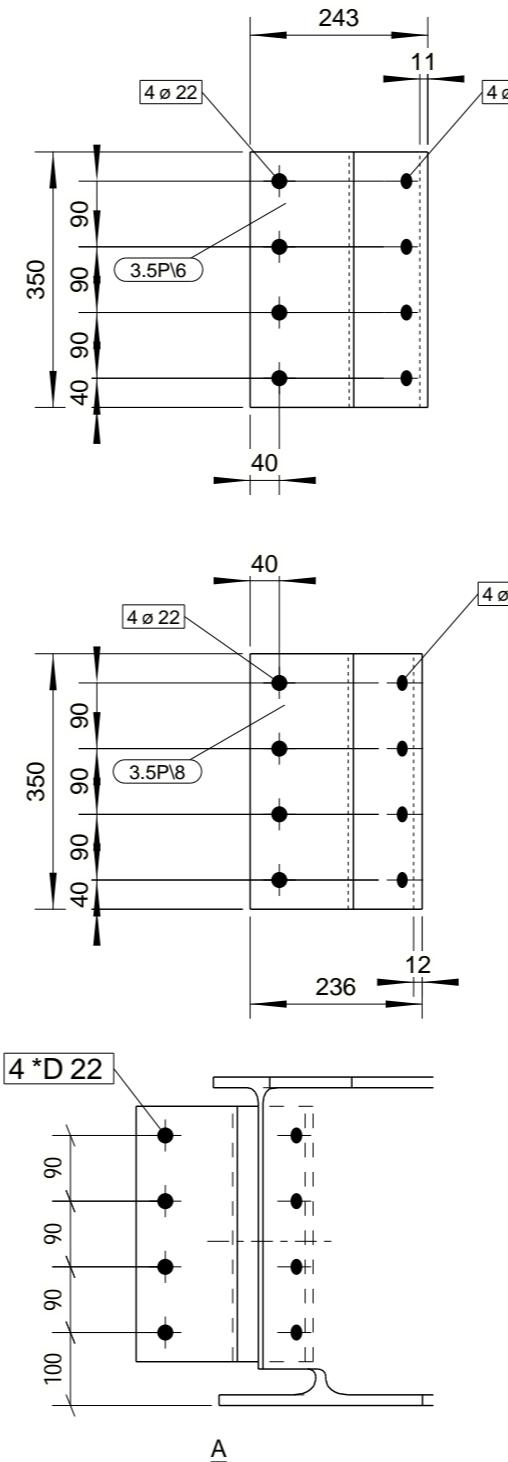


GRID LOCATION		
3.5B\1	K-L/1***	+3.512

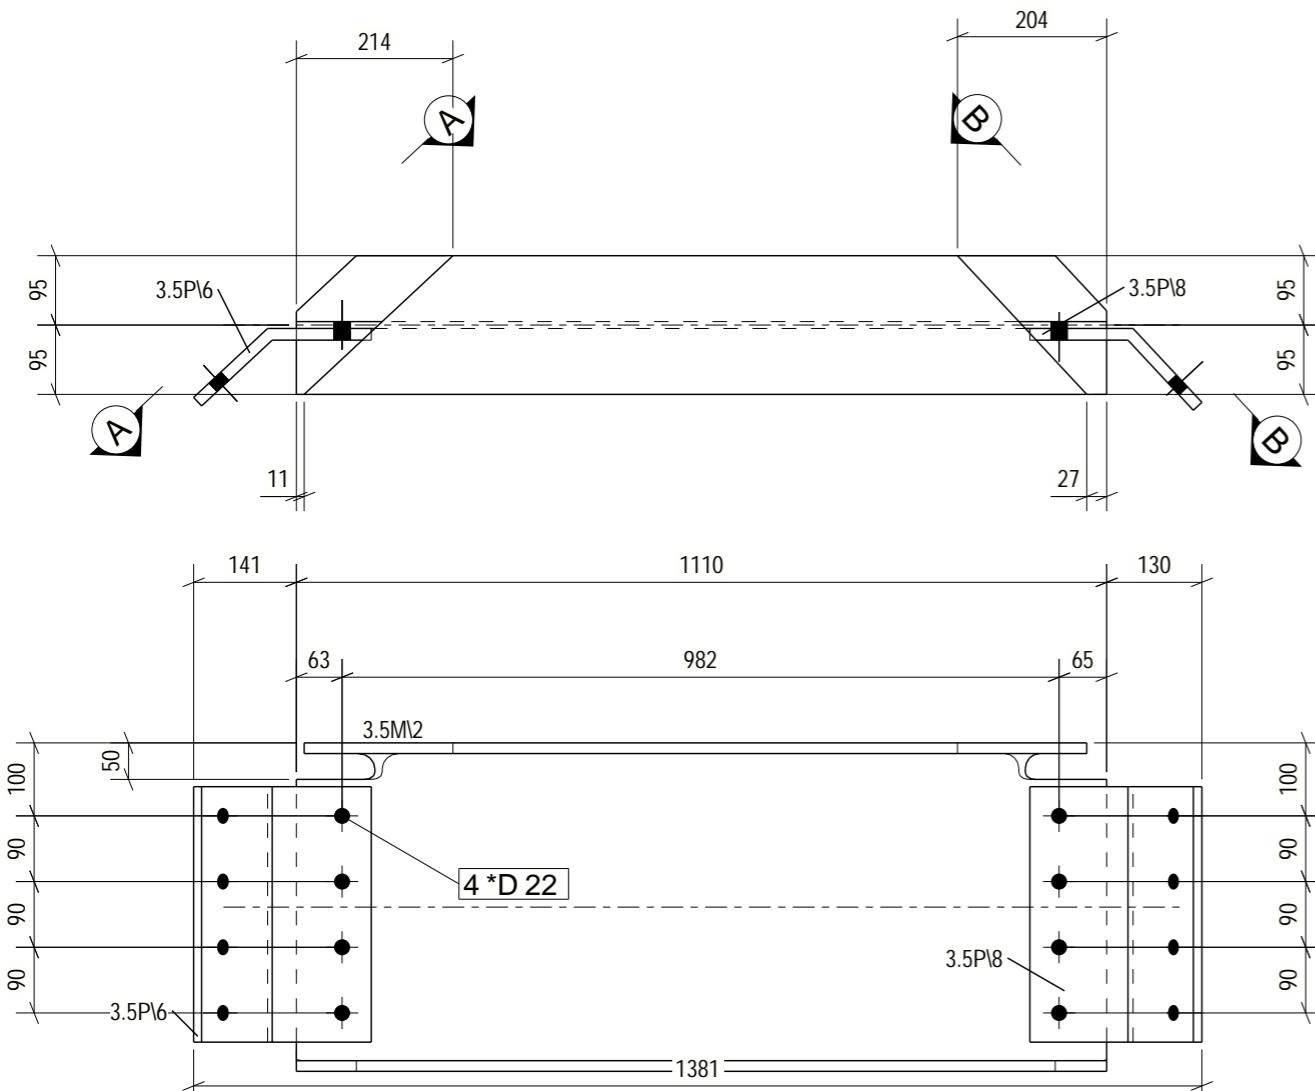

ONE-BEAM MARKED AS 3.5B\1

## **BILL OF MATERIALS**

ASSEMBLY MK'D : 3.5B\1

ASSY QTY : 1

Item Mark	Qty./Assembly	Profile Size	Wt./SQ. Meter	Length	Wt./Item	Total Qty.	Total Wt.	Material
3.5M\2	1	NPB450X190X77.57	77.57	1110.24	86.13	1	86.13	IS2062
3.5P\6	1	FPL16*274	125.60	350.00	12.06	1	12.06	IS2062
3.5P\8	1	FPL16*273	125.60	350.00	11.99	1	11.99	IS2062
						Total	110.17	

No	REV MARK	REVISION DESCRIPTION	REV. DATE
			<b>Powered by Tekla®</b> 
DRAWING TITLE		BEAM	
CONTRACT		Trimble Solutions India Pvt Ltd	
MODELLED BY		ISSUED	
CONTRACT NO		SCALE 1:10 1:10	A3
DRAWING No		REVISION No.	