
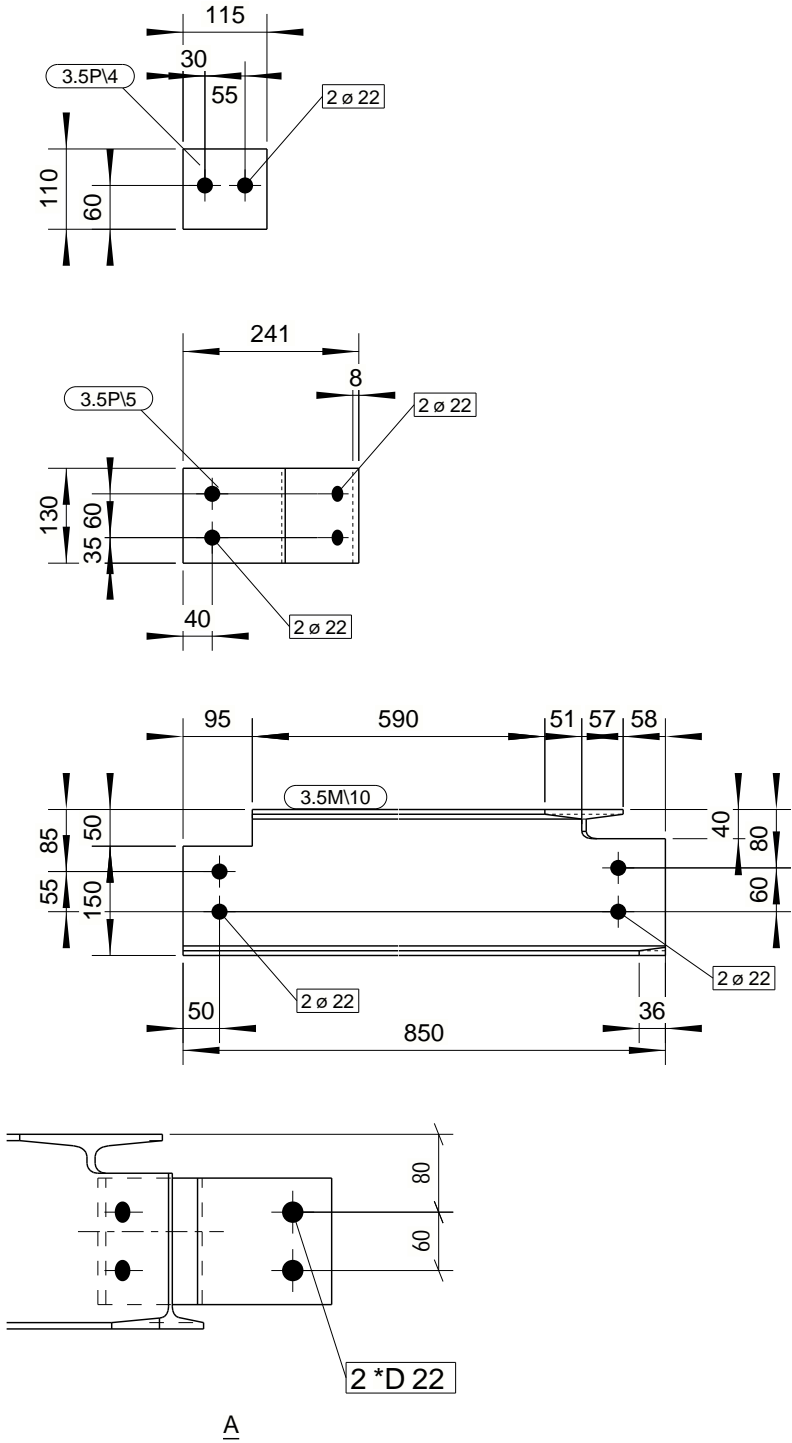


GRID LOCATION		
3.5B\2	K-L/1***	+3.512

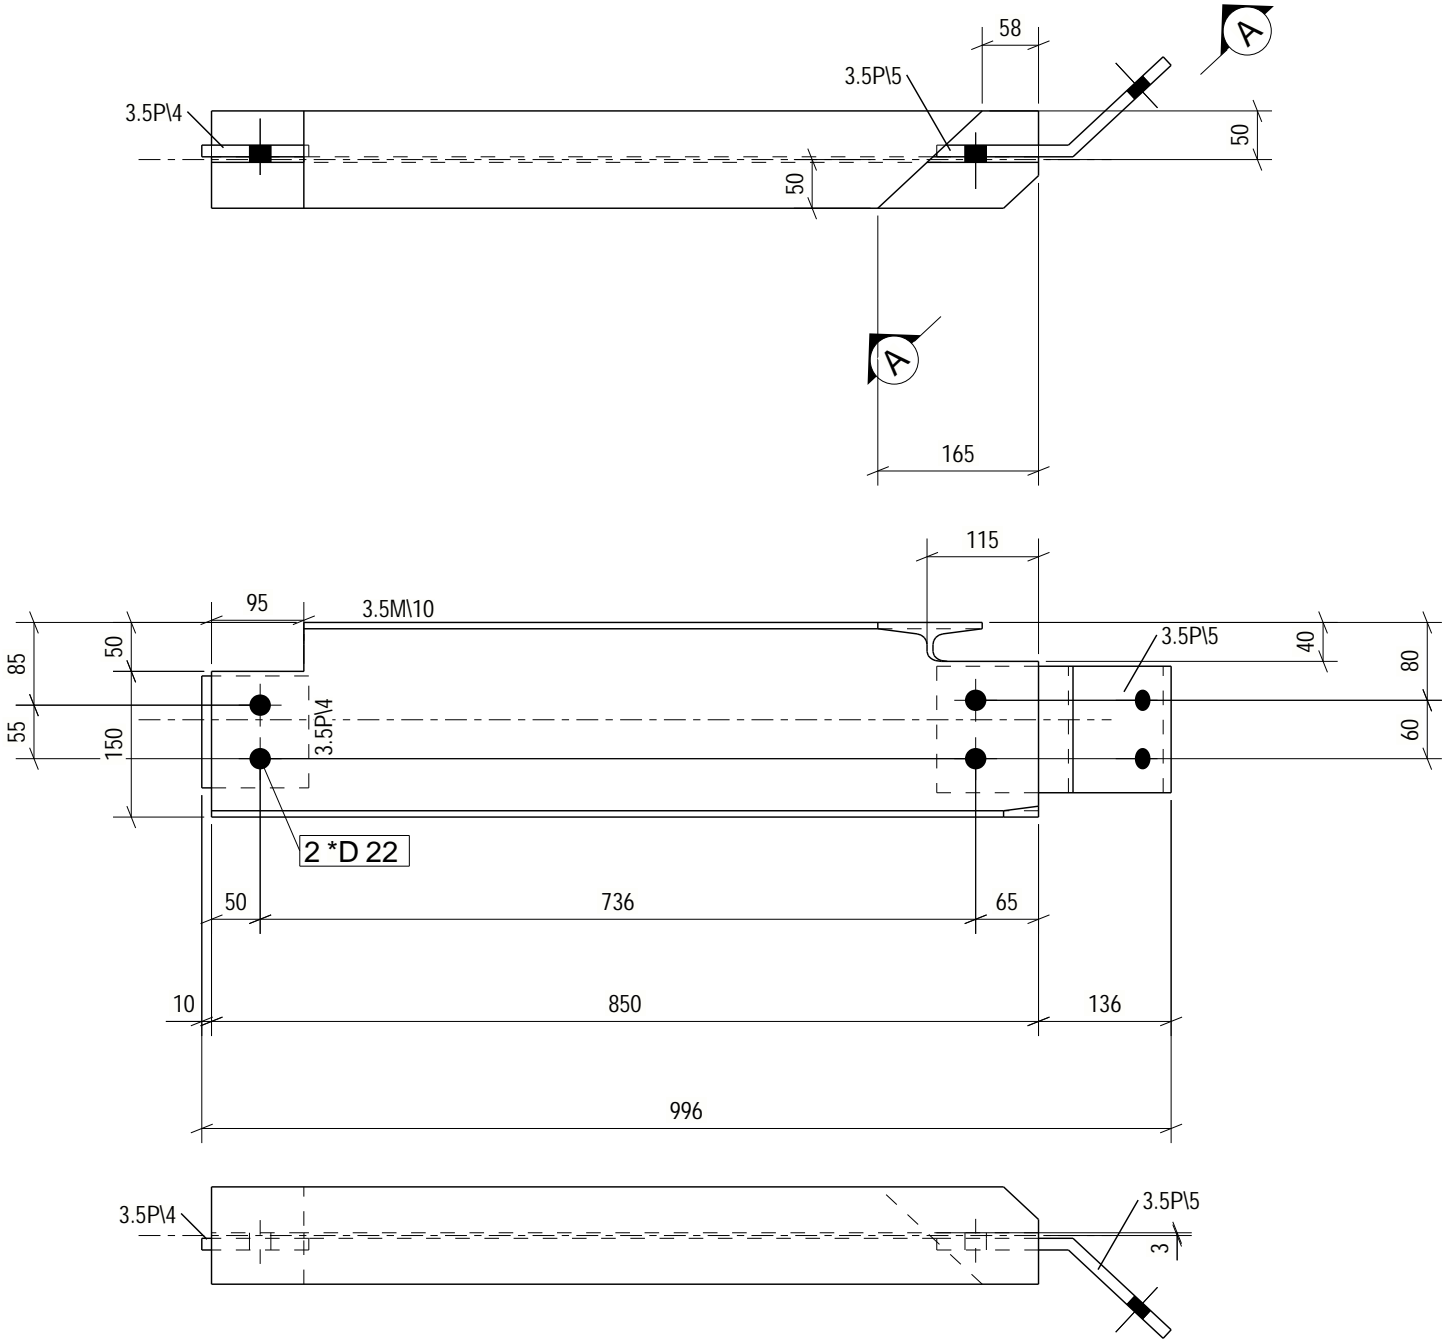

ONE-BEAM MARKED AS 3.5B\2

BILL OF MATERIALS								
ASSEMBLY MK'D : 3.5B\2								
ASSY QTY : 1								
Item Mark	Qty./ Assembly	Profile Size	Wt./ SQ. Meter	Length	Wt./Item	Total Qty.	Total Wt.	Material
3.5M10	1	ISMB200	24.20	850.11	20.55	1	20.55	IS2062
3.5P\4	1	PL12*110	94.20	115.00	1.19	1	1.19	IS2062
3.5P\5	1	FPL12*130	94.20	273.20	3.35	1	3.35	IS2062
Total							25.09	

No	REV MARK	REVISION DESCRIPTION	REV. DATE
<div> <div>Powered by Tekla</div> <div>Trimble</div> </div>			
DRAWING TITLE		BEAM	
CONTRACT		Trimble Solutions India Pvt Ltd	
MODELLED BY		ISSUED	
CONTRACT NO		1000	SCALE 1:7.5 1:10
DRAWING No		[3.5B.2]	REVISION No.

A3